

TYPE

S

STAINLESS STEEL SUBMERSIBLE SUMP PUMP




PUMP WITH DISCHARGES SIZE 1¼" ~ 1½"
CAPACITIES TO 125 GPM, HEADS TO 43 FEET
IN 3450 RPM OPERATION

ALL STAINLESS STEEL
DOUBLE ROW BEARING & DUAL MECHANICAL
SEAL. IN SINGLE AND THREE PHASE OPTIONS

HIGH LIGHT

- ⌘ Motors are fully submersible
- ⌘ Pumps are not designed to handle spherical solids
- ⌘ Indoor and outdoor installation
- ⌘ Easy installation and removal
- ⌘ For sump and rain water
- ⌘ Control system available
- ⌘ Fiberglass and steel basin available

INTRODUCTION

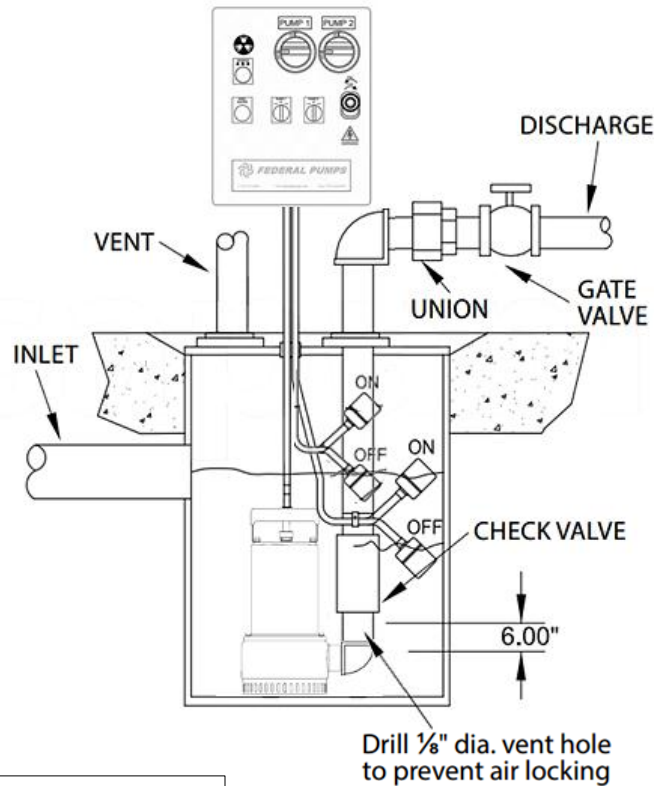

SHOWN AS "SOSP" SERIES PRE-PACKAGED SYSTEM WITH FRAME, COVER AND BASIN

Sump pumps provide for the lifting and disposal of fluids from retaining basins or concrete pits and are pumped to city water disposal lines where these fluids cannot drain under gravity conditions alone. Typically located below grade, sump pumps provide building owners the ability to design and locate floor drains or other facilities below ground that are serviced by these lift stations.

Compatible with Federal Pump's OS, FSS, SBS, TCS, and NPC simplex, and duplex control system, the series can support 24/7 automatic operation for standard sump pump service in residential and small commercial buildings.

The "S" product offering is also conveniently packaged in the "SOSP" system that provides the end user with trouble and maintenance free operation when designed, installed, and maintained properly.

PRODUCT DETAILS

DISCHARGE

1½" NPT, female vertical

LIQUID TEMPERATURE

104°F (40°C) continuous

PUMP BODY

AISI 304 Stainless Steel

IMPELLER

6 vane semi-open ABS impeller

SHAFT

416 series stainless steel

O-RING

Buna-N

HARDWARE

300 series stainless steel

SEAL

Dual mechanical seals with carbon/ceramic(upper) & Silicon Carbide/silicon carbide(lower) faces for extended seal life with stainless steel hardware

CORD ENTRY

20ft. of neoprene cord SJO 14/3, sealed against moisture

BEARINGS

upper row and lower row ball bearing for radial and thrust load

MOTOR

Single Phase: NEMA L, permanent split capacitor, 115, 208, & 230 volts, 60 Hz, 2-pole, air filled, with overload protection in motor.

Three Phase: NEMA B, 208, & 230 volts, 60 Hz, 2-pole, air filled. Overload protection should be included in the control panel.



S-1½R MODEL SHOWN



S-1½R MODEL SHOWN

DISCHARGE

1½" NPT, female horizontal

LIQUID TEMPERATURE

104°F (40°C) continuous

PUMP BODY

AISI 304 Stainless Steel

IMPELLER

5 vane semi-open AISI 304 SS impeller

SHAFT

416 series stainless steel

O-RING

Buna-N

HARDWARE

300 series stainless steel

SEAL

Dual mechanical seals with carbon/ceramic(upper) & Silicon Carbide/silicon carbide(lower) faces for extended seal life with stainless steel hardware

CORD ENTRY

30ft. of neoprene cord SJO 14/3, sealed against moisture

BEARINGS

upper row and lower row ball bearing for radial and thrust load

MOTOR


Single Phase: NEMA L, permanent split capacitor, 115, 208, & 230 volts, 60 Hz, 2-pole, air filled, with overload protection in motor.

Three Phase: NEMA B, 208, & 230 volts, 60 Hz, 2-pole, air filled. Overload protection should be included in the control panel.

SELECTION TABLE*

SYSTEM DESIGN COMPONENTS

The S series sump pump is available in free standing and automatic operation option (**1Ph/115V models only**) and should be reviewed in detail prior to order. Dimensions may vary based upon option requested and custom specification requirements. Every option will include a submersible pump and motor with mechanical seal rated to 104°F. Pump to close coupled to motor. **Add “.A” to the “DISCHARGE SIZE & SUSP. PLATE DESIGN” for 1Phase/115V models to add built-in automatic float switch to the pump.**

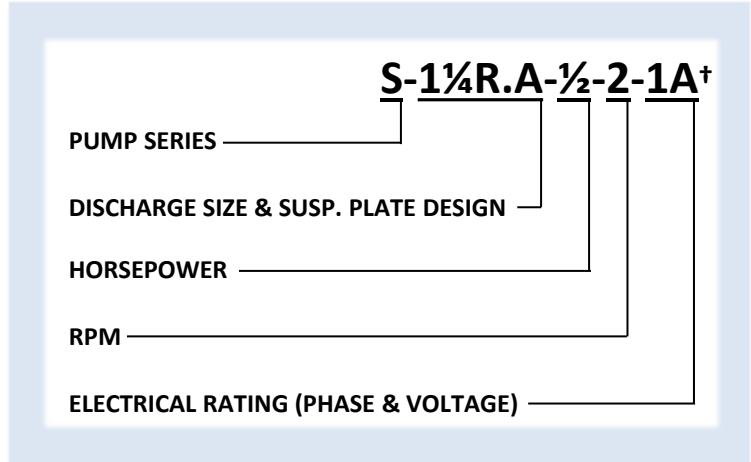

† 1=1PH, 3=3PH

A=115V, B=208V, C=230V, D=460V

MODEL NO	G.P.M.	DISCH. HEAD [FEET]	MOTOR H.P.	DISCH. SIZE [INCHES]
S-1 $\frac{1}{4}$ R- $\frac{1}{4}$ -2-#*	10	22	$\frac{1}{4}$	1 $\frac{1}{4}$
S-1 $\frac{1}{4}$ R- $\frac{1}{2}$ -2-#*		24	$\frac{1}{2}$	1 $\frac{1}{4}$
S-1 $\frac{1}{2}$ R- $\frac{1}{2}$ -2-#*		34	$\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R- $\frac{3}{4}$ -2-#*		38	$\frac{3}{4}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*		38	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		43	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{4}$ R- $\frac{1}{4}$ -2-#*	15	18	$\frac{1}{4}$	1 $\frac{1}{4}$
S-1 $\frac{1}{4}$ R- $\frac{1}{2}$ -2-#*		21	$\frac{1}{2}$	1 $\frac{1}{4}$
S-1 $\frac{1}{2}$ R- $\frac{1}{2}$ -2-#*		27	$\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R- $\frac{3}{4}$ -2-#*		36	$\frac{3}{4}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*		37	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		40	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{4}$ R- $\frac{1}{4}$ -2-#*	20	13	$\frac{1}{4}$	1 $\frac{1}{4}$
S-1 $\frac{1}{4}$ R- $\frac{1}{2}$ -2-#*		17 $\frac{1}{2}$	$\frac{1}{2}$	1 $\frac{1}{4}$
S-1 $\frac{1}{2}$ R- $\frac{1}{2}$ -2-#*		21	$\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R- $\frac{3}{4}$ -2-#*		33	$\frac{3}{4}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*		36	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		38	1 $\frac{1}{2}$	1 $\frac{1}{2}$

MODEL NO	G.P.M.	DISCH. HEAD [FEET]	MOTOR H.P.	DISCH. SIZE [INCHES]
S-1 $\frac{1}{4}$ R- $\frac{1}{3}$ -2-#*	30	10	$\frac{1}{3}$	1 $\frac{1}{4}$
S-1 $\frac{1}{2}$ R- $\frac{1}{2}$ -2-#*		14	$\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R- $\frac{3}{4}$ -2-#*		30	$\frac{3}{4}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*		35	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		35	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R- $\frac{3}{4}$ -2-#*		21	$\frac{3}{4}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*	40	31	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		33	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R- $\frac{3}{4}$ -2-#*	50	15	$\frac{3}{4}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*		27	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		31	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1-2-#*	75	15	1	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*		25	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*	100	19	1 $\frac{1}{2}$	1 $\frac{1}{2}$
S-1 $\frac{1}{2}$ R-1 $\frac{1}{2}$ -2-#*	125	12 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$


*Table is used for quick sizing only. Refer to pump performance curve for exact pump operation over its range.

*Refer to page 9 for amp draw on the each pump and model selection

Only models running in 1Ph/115V in the S series sump pump line are available with automatic float switch option.

Add 2 pounds to equipment weight for automatic float switch options.

SERIES PERFORMANCE RANGE


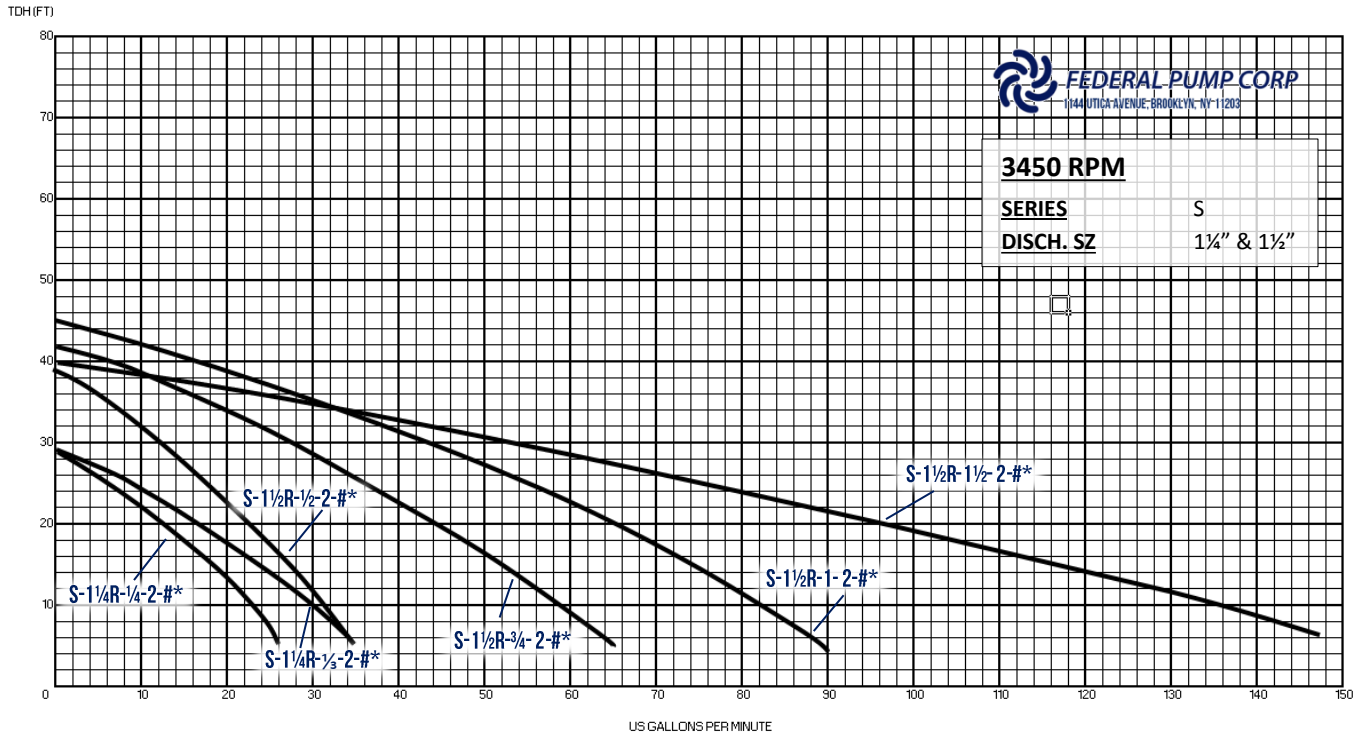


MODEL	MOTOR HP	DISCH. SIZE [INCHES]	RPM	IMPELLER	WEIGHT [lb.]
S-1 1/4 R-1/4-2-#*	1/4	1 1/4	3450	SP180	14
S-1 1/4 R-1/2-2-#*	1/4	1 1/4	3450	SP250	18
S-1 1/2 R-1/2-2-#*	1/2	1 1/2	3450	SP370	28
S-1 1/2 R-3/4-2-#*	3/4	1 1/2	3450	SP550	29
S-1 1/2 R-1-2-#*	1	1 1/2	3450	SP750	32
S-1 1/2 R-1 1/2-2-#*	1 1/2	1 1/2	3450	SP1100	33







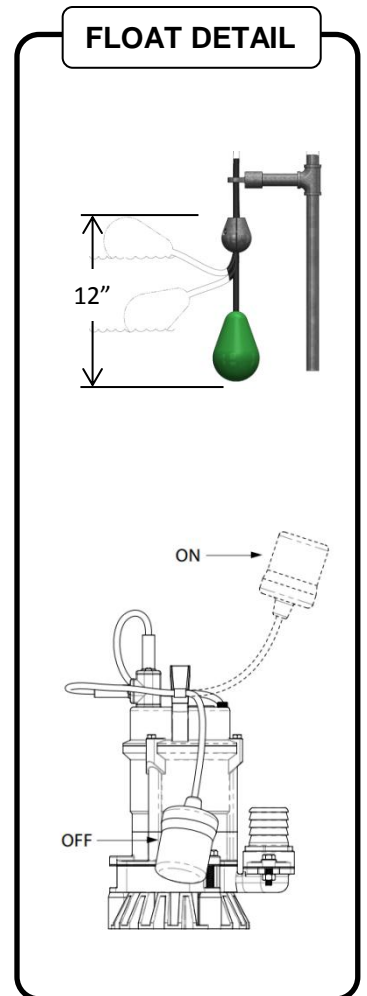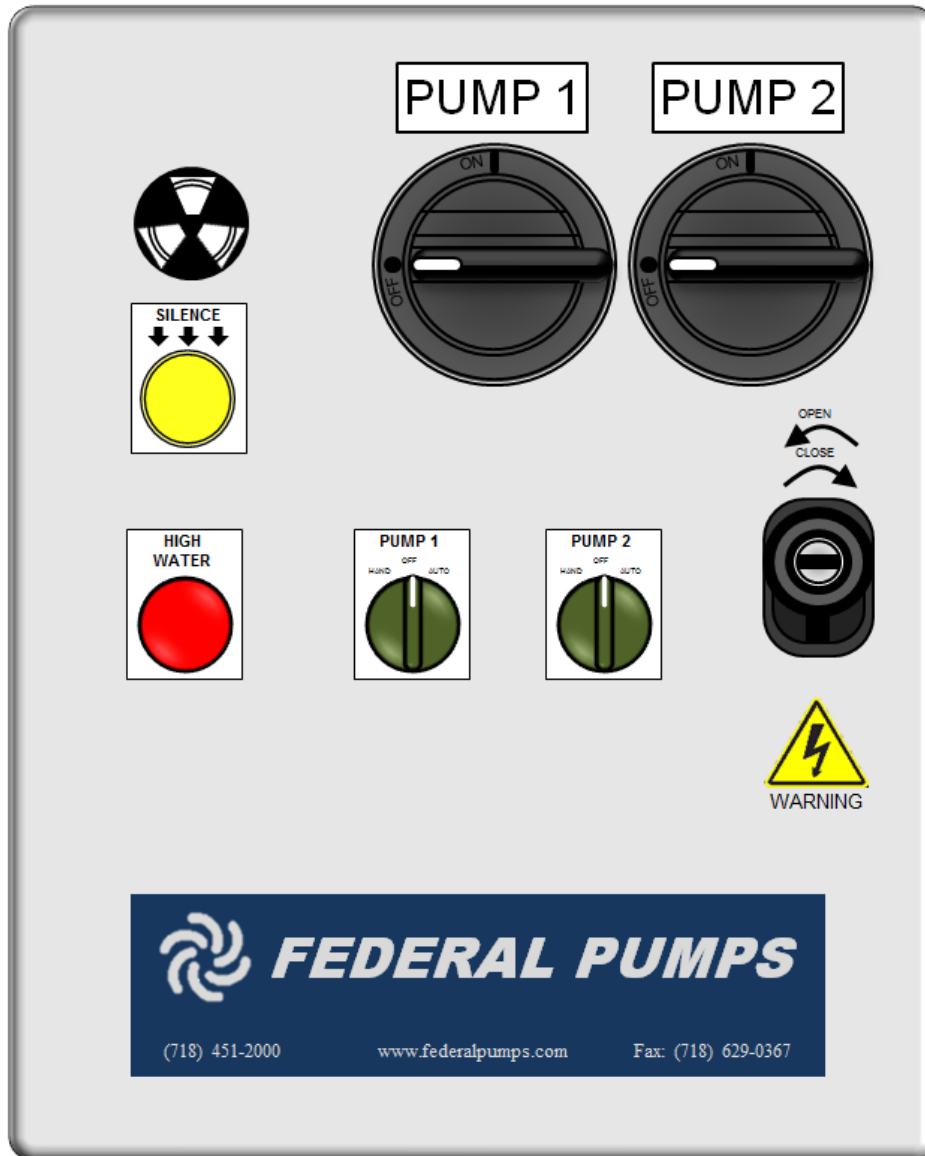


RECOMMENDED MINIMUM PIT & BASIN SIZES

Pump Series	Pump Model	Round		Square	
		Simplex	Duplex	Simplex	Duplex
S	S-1 1/4 R-... S-1 1/2 R-...	24" dia.	36" dia.	24" X 24"	36" X 36"

SUGGESTED CONTROLS – DUPLEX



OS Control Panel & Floats(Standard Items)

-  NEMA Type 1,4 & 12
-  Disconnect Switch
-  Across-the-line Magnetic Starter
-  H-O-A Switch with integral Pilot Light
-  Control Circuit Transformer (24V)
-  HWA Light & Adjustable Buzzer
-  HWA Silencing Push Button
-  Pump Auxiliary Float Switches
-  Dedicated HWA Float Switch

SUGGESTED SPECIFICATIONS – SIMPLEX (PLUG-IN)

General Product Overview: Furnish and install where shown in the plans a Federal Pump Series S simplex submersible sump pump with each pump rated as shown in the pump schedule. Each pump shall include submersible motor, stainless steel casing, standard fitted construction with stainless steel shaft and water proof power cable and automatic float switch. Motor shall be NEMA L, single phase, permanent split capacitor, 115 volts, 60Hz, 3500RPM, air filled and have overload protection.

Sequence of Operation: Plug the factory provided control plug into a GFI receptacle, then plug the pump into the piggy-back plug. In the event of liquid level reaching above the set point, the pump float switch will signal the pump to turn "ON". Upon lowering the liquid level to meet the "OFF" set point, the pump will terminate operation and standby for the next cycle.

Warranty: The pump manufacturer will provide a (1) year limited warranty for material and workmanship and take unit responsibility of the system components.

SUGGESTED SPECIFICATIONS – SIMPLEX (CONTROL PANEL)

General Product Overview: Furnish and install where shown in the plans a Federal Pump Series SOSP simplex submersible sump pump with each pump rated as shown in the pump schedule. Each pump shall include submersible motor, stainless steel casing, standard fitted construction with stainless steel shaft and water proof power cable and automatic float switch. Motor shall be NEMA L, single phase, permanent split capacitor, 115/230 volts, 60Hz, 3500RPM, air filled and have overload protection OR three phase, 208/230/460volts, 60Hz, 3500RPM, air filled.

Controls: Pump manufacturer shall provide a Federal Pump series OS simplex level control system including simplex Control Panel (for wall mounting) and accessory alarms as detailed in this specification. Simplex Pump Controller shall include: disconnect switch with thru-the-door handles, across-the-line type magnetic starters, (overload protection for 3 phase pumps), high water alarm light and horn with silencing push button, (control circuit transformer for non-115V power), programmable logic controller, oil detection relay, numbered terminal strip, and Form-C circuits for BMS. The controls shall be provided in a NEMA 1 enclosure built to UL-580A standard. The SOSP package will include a float switch for ON/OFF & high water alarm conditions.

Sequence of Operation: In the event of liquid level reaching above the set point, the pump float switch will signal the pump to turn "ON". In the event of where the pump is not non-functional or cannot keep up with system demand, the liquid level would continue to rise and signal the High Water Alarm. Upon lowering the liquid level to meet the "OFF" set point, the pump will terminate operation and standby for the next cycle. In the event of presence of oil, the oil sensing element will terminate pump operation and sound the alarm horn and light alerting the presence of oil in the sump.

Warranty: The pump manufacturer will provide a (1) year limited warranty for material and workmanship and take unit responsibility of the system components.

SUGGESTED SPECIFICATIONS – DUPLEX (CONTROL PANEL)

General Product Overview: Furnish and install where shown in the plans a Federal Pump Series SOSP duplex submersible sump pump with each pump rated as shown in the pump schedule. Each pump shall include submersible motor, stainless steel casing, standard fitted construction with stainless steel shaft and water proof power cable and automatic float switch. Motor shall be NEMA L, single phase, permanent split capacitor, 115/230 volts, 60Hz, 3500RPM, air filled and have overload protection OR three phase, 208/230/460volts, 60Hz, 3500RPM, air filled.

Controls: Pump manufacturer shall provide a Federal Pump series OS duplex level control system including Duplex Control Panel (for wall mounting) and accessory alarms as detailed in this specification. Duplex Pump Controller shall include: individual disconnect switches with thru-the-door handles, single-feed power input terminal block, across-the-line type magnetic starters, (overload protection for 3 phase pumps), H-O-A selector switches with integral pilot run lights, (control circuit transformer for non-115V power), high water alarm light and horn with silencing push button, power relays, control relays, oil detection relay, numbered terminal strip, and Form-C circuits for BMS. The controls shall be provided in a NEMA 1 enclosure built to UL-580A standard. The SOSP package will include a float switch for high water alarm conditions. Each of the (2) pumps have dedicated automatic float switch.

Sequence of Operation: In the event of liquid level reaching above the set point, the pump float switch will signal the lead pump to turn "ON". If the liquid level rise above a certain rate where the lead pump along cannot satisfy demand, the lag pump will start at a predetermined set point and work in parallel with the lead pump to satisfy system conditions. Upon lowering the liquid level to meet the "OFF" set point, the lag pump will terminate operation first, then the lead pump, and the two would standby for the next cycle. The system will automatically alternate lead and lag pumps – the pump's level set point will dictate the lead and lag orientation. In the event of where the pumps are not non-functional or cannot keep up with system demand, the liquid level would continue to rise and signal the High Water Alarm. In the event of presence of oil, the oil sensing element will terminate pump operation and sound the alarm horn and light alerting the presence of oil in the sump.

Warranty: The pump manufacturer will provide a (1) year limited warranty for material and workmanship and take unit responsibility of the system components.

SYSTEM SCHEMATIC

Fully automatic sump pump system designed for ease in installation and future pump maintenance


Available to shipped loose for field assembly with fiberglass basins and "gas-tight" covers. The S series effluent pump provides a formidable sump system by combining the ease of installation with a small form factor

Complete set of "SOSP" packaged system includes:

- ⌘ Submersible "S" series sump pumps
- ⌘ Duplex control panel
- ⌘ Automatic float switch
- ⌘ High Water Alarm float switch

Accessories that be modified:

- ⌘ Frame & Cover
- ⌘ Basin

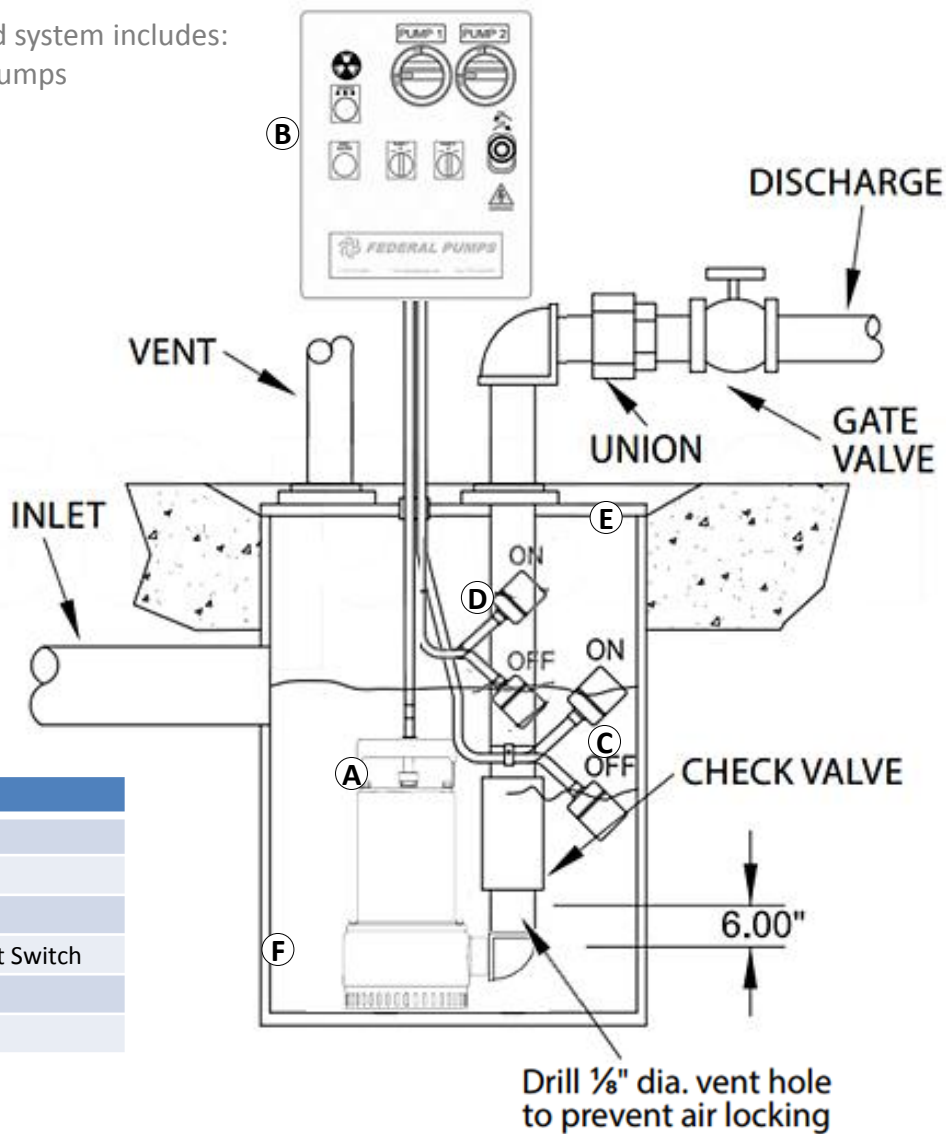

	ITEM
A	Submersible Pump
B	Duplex Panel
C	Float Switches
D	High Water Alarm Float Switch
E	Frame & Cover
F	Basin

PERFORMANCE DATA

ITEM	DESCRIPTION	
DISCHARGE SIZE	1¼" & 1½"	
HORSEPOWER RANGE	¼ ~ 1½ hp	
PERFORMANCE RANGE	25 ~ 125 GPM	
MAX. WATER TEMPERATURE	104°F	
CASING	AISI 304 STAINLESS STEEL	
IMPELLER	S-1¼R-...	6 VANE SEMI-OPEN ABS IMPELLER
	S-1½R-...	5 VANE SEMI-OPEN AISI 304 STAINLESS STEEL IMPELLER
SHAFT	416 SERIES STAINLESS STEEL	
MOTOR HOUSING	AISI 304 STAINLESS STEEL	
CORD ENTRY	20FT(UP TO ½HP) & 30FT NEOPRENE	
FASTENERS	300 SERIES STAINLESS STEEL	
MECHANICAL SEALS	UPPER SEAL: CARBON VS CERAMIC LOWER SEAL: SILICON CARBIDE VS SILICON CARBIDE	
BEARINGS	UPPER ROW: BALL, SINGLE ROW, OIL LUBRICATED, FOR RADIAL & THRUST LOAD LOWER ROW: BALL, SINGLE ROW, OIL LUBRICATED, FOR RADIAL & THRUST LOAD	
MOTOR TYPE	SINGLE PHASE	AIR FILLED NEMA-L PERMANENT SPLIT CAPACITOR WITH OVERLOAD PROTECTION
	THREE PHASE	AIR FILLED NEMA-B WITHOUT OVERLOAD PROTECTION

MOTOR OPERATING PERFORMANCE [AMPS AVG.]



MODEL	HP	1PH/115V	1PH/208V	1PH/230V
S-1¼R-¼...	¼	3.0	1.7	1.5
S-1¼R-½...	½	3.5	1.9	1.8
S-1¼R-¾...	¾	7.2	4.0	3.6
S-1½R-¾...	¾	7.2	4.0	3.6
S-1½R-1...	1	9.0	5.0	4.5
S-1½R-1½...	1½	15.0	8.3	7.5

MODEL	HP	3PH/208V	3PH/230V	3PH/460V
S-1¼R-¼...	¼	-	-	-
S-1¼R-½...	½	-	-	-
S-1¼R-¾...	¾	2.2	2.0	-
S-1½R-¾...	¾	2.2	2.0	-
S-1½R-1...	1	2.9	2.6	1.3
S-1½R-1½...	1½	4.8	4.3	2.2


NOTES:

1. Motors are designed for 20 starts per hour. Level devices and pit depths should be designed to maintain 10~12 starts per hours at maximum 104°F for typical sump pump applications
2. Float devices require 8~12" of water level differential from low float(OFF) to high float(ON) position. Basins should be designed to accommodate float level differential
3. High water alarm float(ON level) should be designed to activate at 6" below the bottom of invert to prevent any fluids backing into the supply lines. Float switch tilt travel of 12" should be considered
4. Most fiberglass basins limit temperature to less than 120°F. For temperature in excess of 120°F where fiberglass basins are required, contact the factory for special assistance


DIMENSIONAL DATA

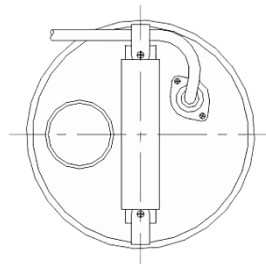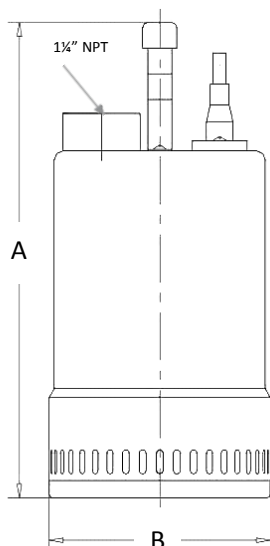

Disch.	Model	HP	RPM	A	B	Lb.
1½	S- 1½R...	¾ & 1	3450	11.65	5.92	14(¾HP) & 18(1HP)

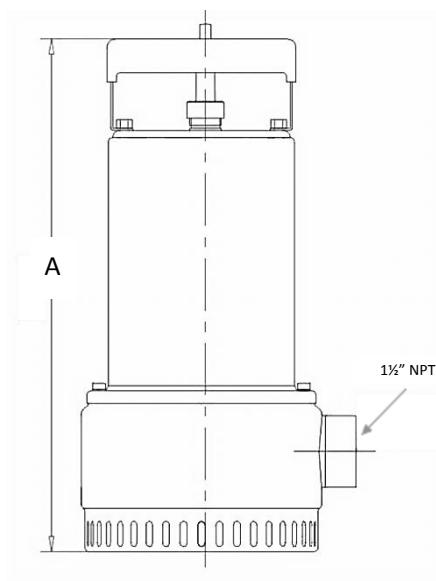

Dimensions in inches

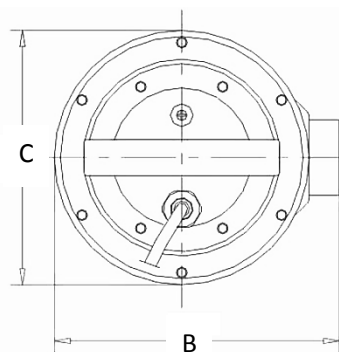


Disch.	Model	HP	RPM	A	B	C	Lb.
1½	S- 1½R...	¾, 1, & 1½	3450	15.20	7.75	6.70	28(¾HP), 29(1HP), 32(1HP), 33(1½HP)

[illegible]



**Variable Speed Booster
Model VSPV(up to 300 PSI)**

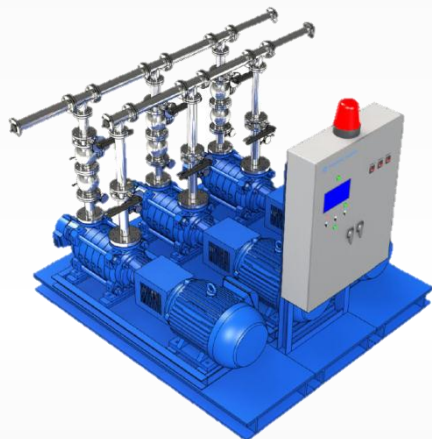

**Variable Speed Booster
Model VSPM(up to 600 PSI)**



**Oil Shield Elevator Sump System
Model SOSP(up to 125GPM)**

Since 1927 Federal Pump has been a leading provider of reliable and innovative fluid handling solutions for supply water management and dewatering pump services.

Its recent introduction of the VSPV & VSPM variable speed domestic water supply system combines innovative technological advancements in premium efficient motors and variable speed drive support programs that reduce energy demand, lower operating costs, and provide more finely tuned supply controls.

Its VSA/VSP vertical pump rated to 210F provides solutions in dewatering applications where condensate or boiler feed water are collected and then cooled and pumped to city sewer connections providing continuous service where submersible pumps do not provide a sustainable solution.


The SOSP Oil Shield sump pumps alerting building management to potential oil leaks in the elevator areas provide additional building support.

High rise roof fill applications, water make-up systems for mechanical equipment utilizing rain water systems and energy efficient condensate, boiler feed, and vacuum condensate units continue in the focus of energy efficiency and building support.

In the tradition of leadership through product innovation, quality designs, and reliable customer service, Federal Pump continues to be a supplier to those water management and dewatering markets where it first started that tradition of leadership in Brooklyn, N.Y.



**Vertical Sewage/Sump Pump
Model VSA/VSP(up to 1400GPM)**

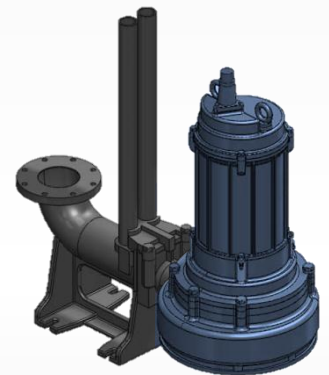

**Submersible Sewage/Sump Pump
Model MSC-QD/J(up to 500GPM)**



1144 Utica Avenue
Brooklyn, N.Y. 11203
Tel: 718-451-2000
www.Federalpumps.com