

Indeeco's confined space plenum unit heater is the perfect heating solution for parking garages and confined spaces

Product Features

Performance Features

- Wattages up to 5 kW
- Voltages up to 480V / 3PH
- Temperature rises up to 57° F
- Air throw 16 ft

Safety Features

- Automatic reset thermal limit

Construction Features

- Easily fits between joists for typical applications
- Zero clearance for wall and ceiling mounting as well as floor mounting with appropriate inlet and outlet clearances
- Bracket standard or can be mounted by 3/8" threaded rod (field supplied)
- 24V control circuit on three phase models with hydraulic thermostat

Industry Applications

- Parking Garages
- Crawl Spaces
- Inside plenums
- Above drop ceilings

Certifications



Conforms to ANSI/UL 1995
Certified to CAN/CSA C 22.2 No.236-11



Our products do more in a wide range of applications. **Expect More.**


Standard Models

Catalog Number	Watts (3)	Btus	Volts (1)	PH	Amps	Temp Rise	Temp Range	Air Throw	CFM	Wt. (lbs)	Availability Code (2)
P-961U5000V-T	5000	17065	240	1	21	57° F	(40° F - 120° F)	16'	275	32	AS
	4165	14215			17	48° F					
	3332	11365			14	38° F					
	2500	8533			10	29° F					
	3750	12798	208	1	18	43° F	(40° F - 120° F)	16'	275	32	
	3123	10659			15	36° F					
	2500	8553			12	29° F					
	1874	6396			9	21° F					
P-961U5000K-T	3750	12799	208	3	10.4	43° F	(40° F - 110° F)	16'	275	32	
	5000	17065	240	3	12	57° F			275	32	
P-961U5000U-T	5000	17065	480	3	6	57° F	(40° F - 110° F)	16'	275	32	

(1) 60 Hz Only

(2) AS = Assemble Stock, AS listed heaters ordered with custom (C) features are subject to longer lead times

(3) 240/208 single phase unit is factory wired for 5kW. The heater may be field changed to listed wattages, see IOM for instructions.

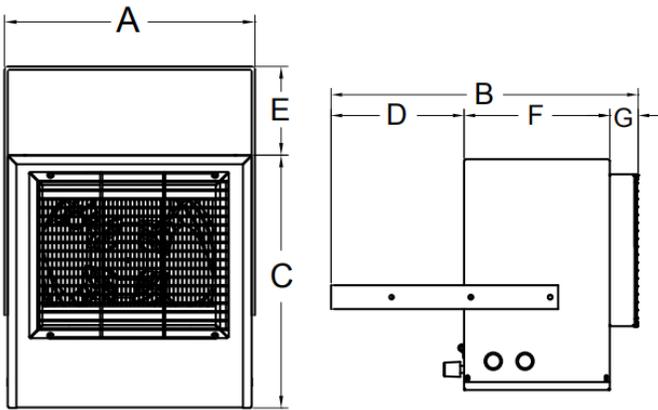

Product Dimensions

A	B	C	D	E	F	G
14.4"	19.4"	14.5"	8.4"	5.1"	9*2"	1.8"

Got tough questions?
 Indeeco can get you to
 the best answers fast.
Ask More.