

SWEP FTW250AS


FTW250AS is adopting the breakthrough technology Hypertwain®. Developed to provide a solution for all the reversible systems, where the demand to have an equally efficient heat exchanger in both co-current and counter-current, is yet to be meet. With FTW250AS, not only efficiency at full load but also partial load conditions have been brought to the highest level. Also, due to our technology, freezing robustness during defrosts and distribution stability have been drastically improved. Suitable in capacities up to 300kW with all low GWP high pressure refrigerants.



Basic specifications


Maximum number of plates (NoP)	250
Max flow	62 m³/h (272.98 gpm)
Channel volume	0.19/0.229 dm³ (0.0067/0.0081 ft³)
Material	316 Stainless Steel Plates, Cover Plates in 304 Stainless Steel, Copper Brazing
Weight excl. connections	13.05+(0.335*NoP) kg 28.77+(0.739*NoP) lb
Max Particle Size (mm)	0.9

Standard dimensions

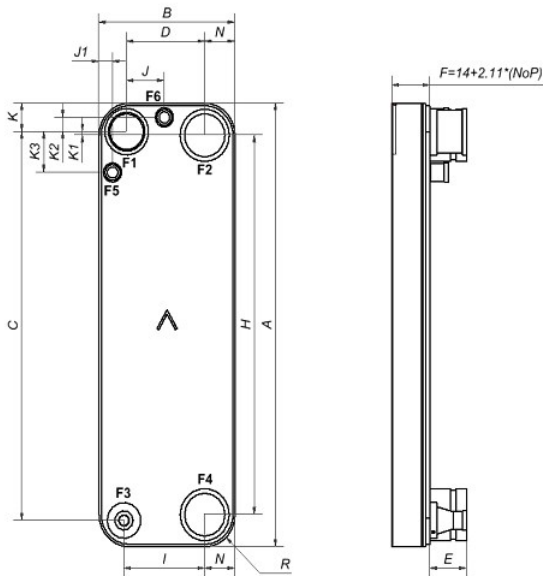

#	MM	IN
A	620	24.41
B	202	7.95
C	543	21.38
D	116	4.57
F	14,00+2,11*(NoP)	0.55+0.08 *(NoP)
G	0	0
H	530	20.87
I	120	4.72
J	56	2.2
K	40	1.57
N	45	1.77
R	45	1.77
E_1	27	1.06
E_2	54	2.13
J_1	21	0.83
K_1	5	0.2
K_2	20	0.79
K_3	57	2.24


Available connections




Victaulic Connection Solder Connection

*For specific dimensions, or information about other types of connections, please contact your SWEP sales representative.

PED Pressure / Temperature

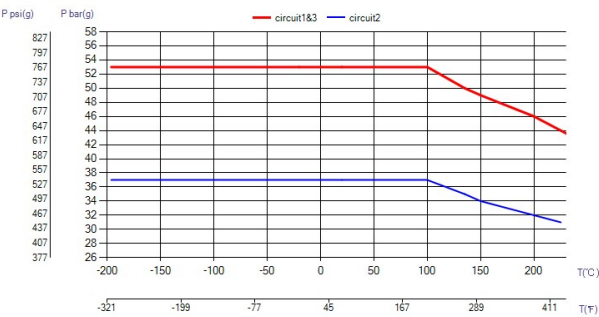

UL Pressure / Temperature

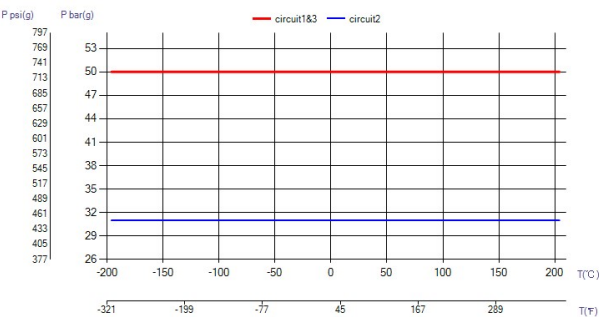

Product Concept

The Brazed Plate Heat Exchanger (BPHE) is constructed as a plate package of corrugated channel plates with a filler material between each plate. During the vacuum brazing process, the filler material forms a brazed joint at every contact point between the plates, creating complex channels. The BPHE allows media at different temperatures to come into close proximity, separated only by channel plates that enable heat from one media to be transferred to the other with very high efficiency. The concept is similar to other plate and frame technology, but without the gaskets and frame parts.

3rd party Approvals

Most SWEP products are approved by below listed certification organizations: Europe, Pressure Equipment Directive (PED) America, Underwriters Laboratories Inc (UL) Japan, Kouatsu-Gas Hoan Kyoukai (KHK) Additionally SWEP holds approvals from a vast variety of other certification organizations. For more details please contact your local SWEP representative. SWEP reserves the right to make changes without prior notice.

Find product solution - SSP

With SWEP’s unique SSP, the SWEP Software Package, you can do advanced heat transfer calculations yourself. It’s also easy to choose connections and generate drawings of the complete product. If you would like advice, SWEP offers all the service and support you need. Several SWEP accessories are also available to fulfill additional needs.

Disclaimer

The information and recommendations in regards to the products are presented in good faith, however, SWEP makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products’ suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still object to corrosion if used in unsuitable environments. Standard data is presented, product variants with different data may exist. Contact your SWEP sales representative for more details. SWEP may change any data without notice.