

PLUMBING SYSTEMS COMMERCIAL IRONHEART LT



FOR WHERE IT REALLY MATTERS

SyncroFlo is based in Norcross, GA with over 50 years of experience manufacturing packaged pumping systems and the first to prepackage pumping systems for boosting pressure in domestic water distribution systems. The "IronHeart," which has been the core of our business since 1985, has been the industry standard for pressure boosting domestic water in commercial buildings. The new IronHeart LT offering comes with the new Platinum pump controller complete with all the features SyncroFlo is known for and an economical hydraulic package. Designed with the budget conscience owner in mind we offer multiple standard preconfigured units in both 460 & 208 volt to meet today's ever tightening job schedules.

WHY A SYNCROFLO PRE PACKAGED SYSTEM?


All SyncroFlo IronHeart systems are manufactured to the highest standards within the 155,000 square foot facility. SyncroFlo has a superior Quality Management System that is ISO 9001:2015 certified. All systems bear the UL & ETL labels and are certified to UL 778 and UL 508A standards. All our domestic water systems including the IronHeart line are NSF/ANSI 61, 372 & Annex G certified for drinking water applications. Control panels are assembled in a UL 508A panel shop with a QR (Quick Reference) code identification for web based access to the project documents. All systems are factory tested in a NIST traceable test stand and the results are recorded for generation of an XY plot.

QUALITY CONTROL AND TESTING!

SyncroFlo's quality control program is on the leading edge of technology for our industry. Each system is tracked at all stages of manufacturing, assembly, and testing with web based reporting via hand held devices. All welding is performed by AWS or ASME qualified welders. Once manufacturing and assembly are complete, the system is connected to our NIST calibrated test rig. We then hydrostatically test and flow test from zero to 100% of design and under specified suction and net delivery pressures. Once on site, your only surprise is how easy the system is to startup and commission.



PLUMBING - COMMERCIAL IRONHEART LT

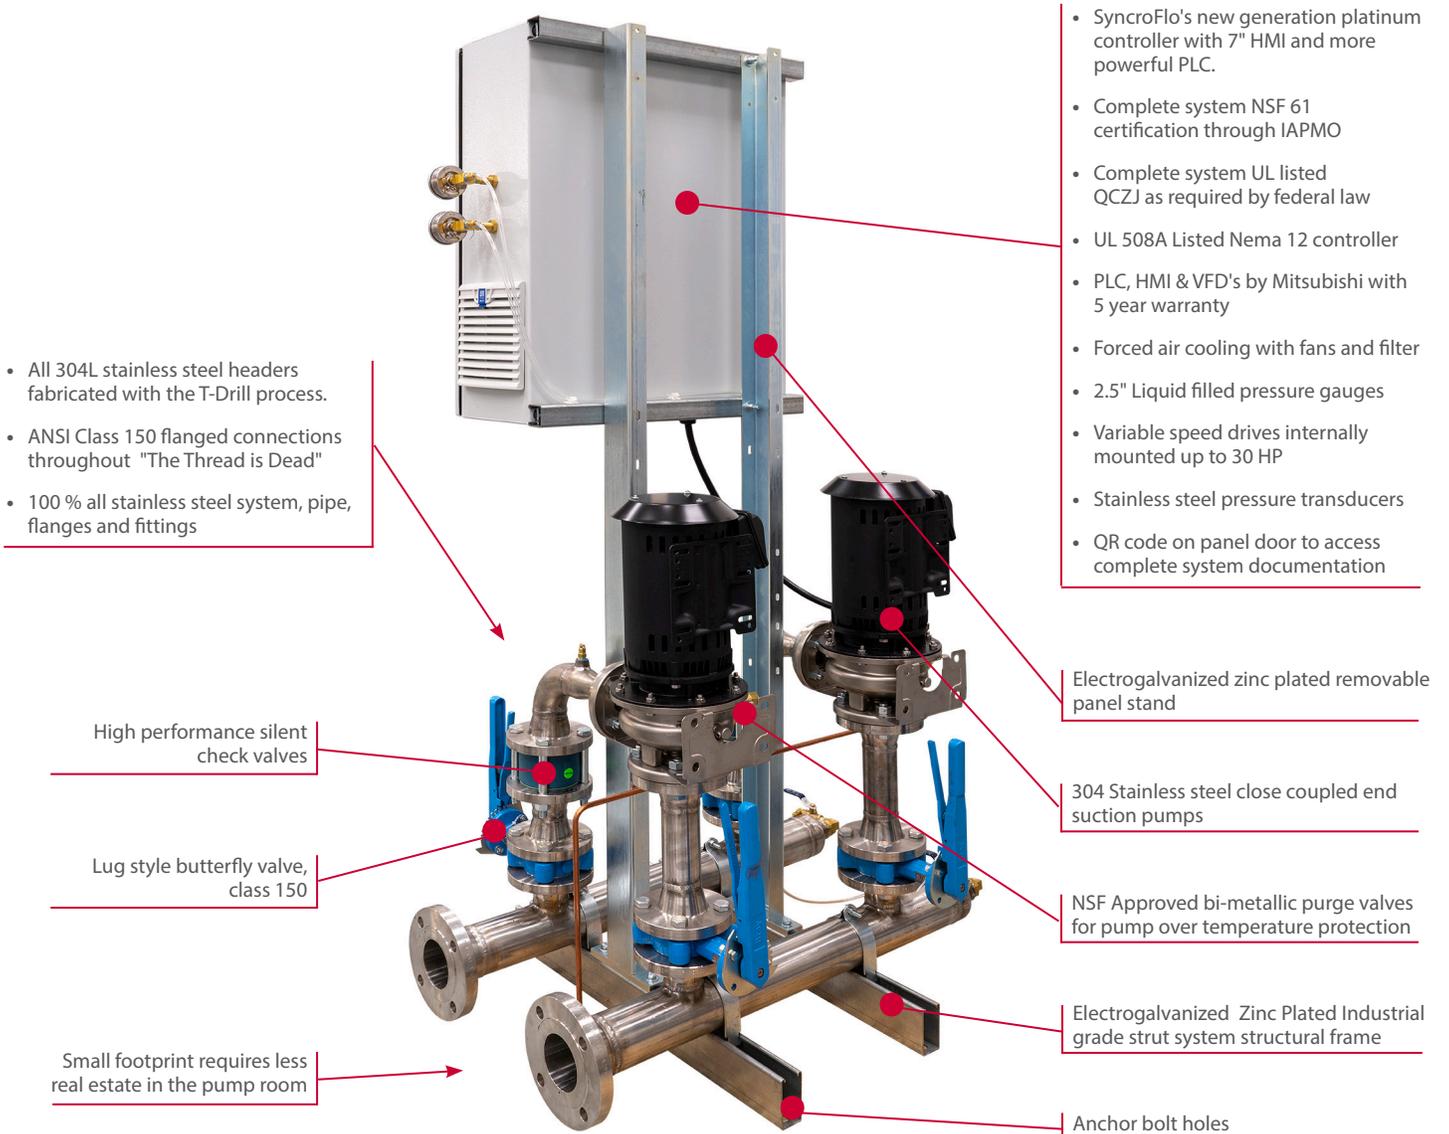

PUMP TYPES

Close Coupled End Suction

PERFORMANCE

- 3", 4" & 6" Discharges
- Flow Rates to 750 GPM
- Heads to 450'

FEATURES

- UL and ETL LISTED 778 and 508A
- NSF/ANSI 61 & 372 certified
- Annex G and 372 with NSF 61
- 100% flanged construction "THE THREAD IS DEAD!"
- 304 Stainless steel pumps close coupled end suction
- Zinc electro plated base with anchor holes and pipe supports

- Lug style isolation butterfly valves
- High performance check valves for low station losses
- PLC and HMI based controls with 5 year warranty standard
- Nema 12 enclosure with air filter and fan for heat dissipation
- Bolt on panel stand
- QR code system identification for web based access to system manuals