



SYSTEMATIC SUPPLY AND DISPOSAL

User-friendly service stations
for train care maintenance facilities

VOGELSANG – LEADING IN TECHNOLOGY

VOGELSANG







Unique and reliable supply and disposal

Quality, experience and expertise guarantee future-proof technology

As the inventor of the elastomer-coated rotary lobe pump, technology leader Vogelsang has been one of the world's leading mechanical engineering companies in the pump sector for decades. Railway transport companies, bus companies and ports have been relying on our high-quality machines for years, especially thanks to the sophisticated design of the rotary lobe pump.

Based on our wide-ranging experience and constant research, we not only develop extremely functional components and entire systems that ensure long-term, trouble-free and economical operation – they also have to be easy to handle. Both the production and the material quality of our machines are testimony to how seriously we take our responsibility to our customers. Their adaptability and changeability enhance efficiency, optimise performance and increase sustainability.

A sophisticated logistics system covering cleanliness, hygiene, wastewater disposal and freshwater supply is necessary to meet all the requirements for operating modern passenger trains. Vogelsang offers individual solutions for stationary service systems, starting with small ones (single point solutions) up to larger train treatment systems (multi-point systems).



The all-in one solution

Standalone systems – Special wastewater disposal systems for small train care depots and service stations

The compact systems equipped with rotary lobe pumps from Vogelsang cover the whole scope of wastewater disposal and fresh water supply. The standalone systems can be installed directly on the service platform and all have integrated water and wastewater connectors. An optional heating system and thermal insulation down to temperatures of - 25 °C ensures continued operation when temperatures drop.


TUnit SP

The vacuum and water hoses are mounted to a T-shaped mast at the TUnit SP service point. The automatic hose retraction mechanism guarantees the maximum usage range and keeps the hoses manageable. The time-controlled hygienic rinsing makes sure that the fresh water facilities are cleaned regularly. The integrated pump of the TUnit SP can also operate an additional satellite module.

CabinetUnit SP

The CabinetUnit is an integrated supply and disposal station with a modular cabinet design. It is especially well-suited for smaller rail treatment systems, workshops and service stations. It also has an automatic hose retraction function, hygienic rinsing and a water stop function. It can be accessed from both sides of the platform, so it's particularly useful in narrow spaces.

Single point solution

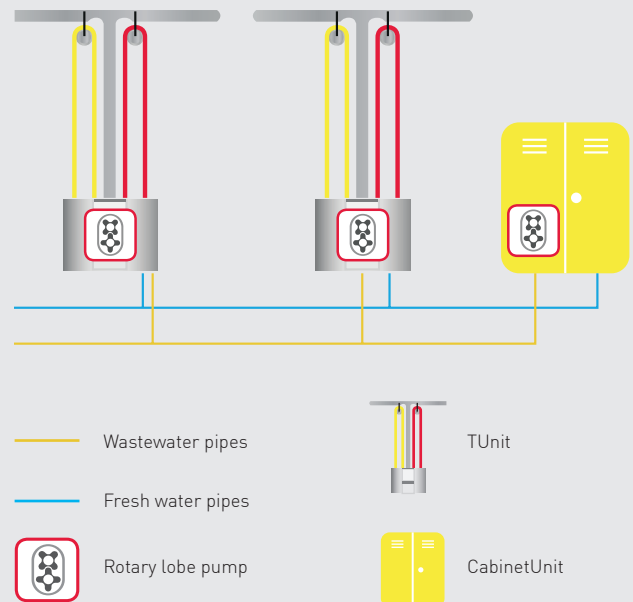

The CabinetUnit SP is available in three models:

- **A2 model**
Wastewater disposal and fresh water supply
- **B2 model**
With integrated cleaners compartment incl. cleaning agent dosing equipment for cleaning the train interior
- **C2 model**
With storage space and cleaners compartment incl. cleaning agent dosing equipment for cleaning the train interior

Custom equipment with bioreactor cleaning function can also be provided upon request.

Advantages of the single point solution

- Compact: Integrated supply and disposal
- Saves time (in the case of the TUnit SP, through full automatic valves)
- Ergonomic design
- Better system availability because of integrated interfaces to monitor the systems



Multitasking wonder

Multi-point supply and disposal systems: Central systems for medium to large scale depots

Multi-point systems consist of at least one central pumping unit and multiple service stations. The size and structure of a multi-point system can be customised based on how frequented the system is, its technical requirements and the service processes.

The system can be equipped with dozens of TUnit systems, CabinetUnits and more with just one central pump station, allowing the service team to perform as highly and quickly as possible. The multiple-station systems can also be customised for different toilet systems. This means that wastewater tanks with water flushing can be covered alongside chemical toilet systems.

A particularly special feature of the multi-point system is the fail-safe pump that is at the heart of every system. Our systems are fitted with a Vogelsang rotary lobe pump that has been specially developed for viscous and contaminated media. The VacUnit vacuum pump station has proven itself in this area for decades. As a double pump station, the VacUnit pump unit ensures that operation continues if one pump unit requires servicing.

Multi-point systems can be expanded by different options, including automatic monitoring of the operating status and of the individual components such as flow control sensors and fully automatic valves. Additional depot equipment such as rail heating and brake testing systems can also be integrated and monitored with the VEBSys system. The highly-compatible web-based control applications VEBSys allows operating data of all the systems connected to the program to be accessed from anywhere. That makes sure that they are ready for operation, and it can also be used for quality control.



Vogelsang's particularly compact TUnits are fitted with an automatic hose retraction system, making the work of service personnel so much easier.



Compact inner workings: Pump technology makes wastewater disposal from the on-board toilet fast and reliable.

Flexible foundation with a fixed location

The in-ground base

The installation of a CabinetUnit, TUnit or other service modules must be well planned. It is necessary to set up wastewater and fresh water pipes that need to be taken into consideration when building the foundation. To minimise this time-consuming and complicated effort, Vogelsang offers a in-ground base. This prefabricated installation base with integrated supply and disposal connectors can be installed right into the ground. After that, the system can be placed right on and connected right to the base. This means no concrete works, quicker installation, branch pipe work always in correct position. The optional integrated wastewater collection and vacuum discharge unit eliminates the need for conventional drainage by gravity and wastewater lifting systems.



Advantages of the in-ground base


- Saves time and money compared to conventional designs
- No concrete work required
- Easy to set up and install
- Less excavation works
- Re-usable in-ground base

Train Care Maintenance Facilities



Typical use of highly frequented multi-point systems with high traffic volume and simultaneous operation of multiple supply and disposal systems as well as internal cleaning platforms for long train formations.

Multi-point systems and combination of single point solutions and multi-point systems


Multi-point systems

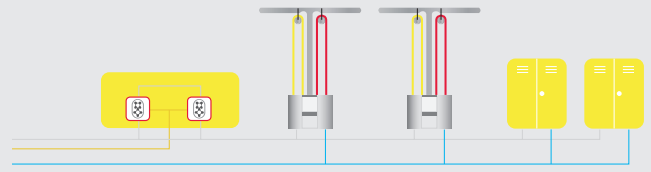

Combination of single point solutions and multi-point systems

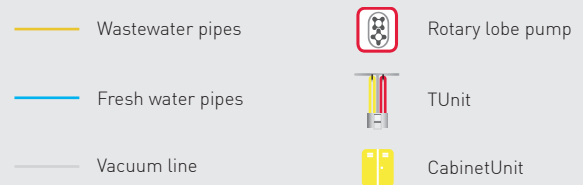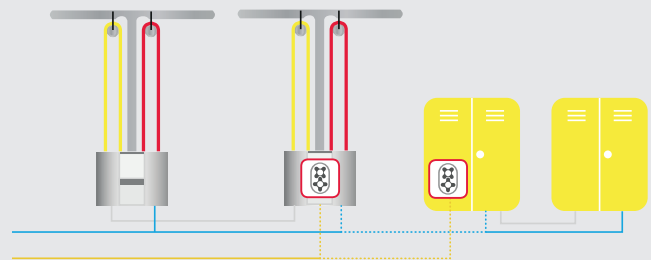


Depending on the factors such as the service life daily vehicle throughput, quantity and position of the on-board toilets, as well as the fleet size, individual solutions can be planned for the highest economic efficiency.

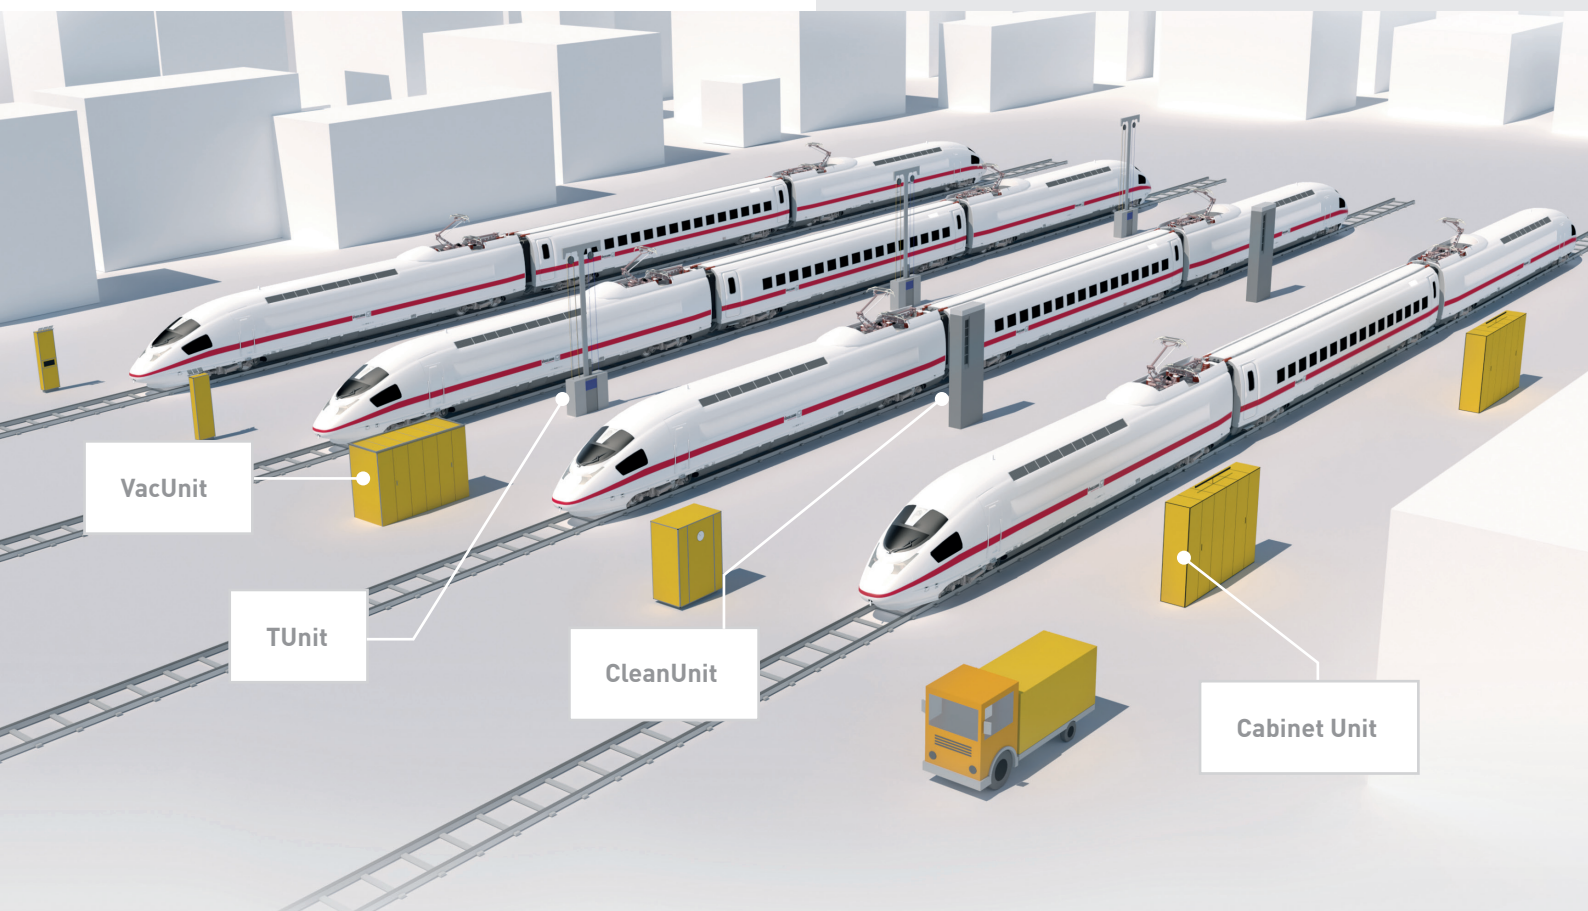

Direct vacuum – greater operational readiness

The VacUnit double pump station:
Compact and reliable pumping
station for wastewater disposal

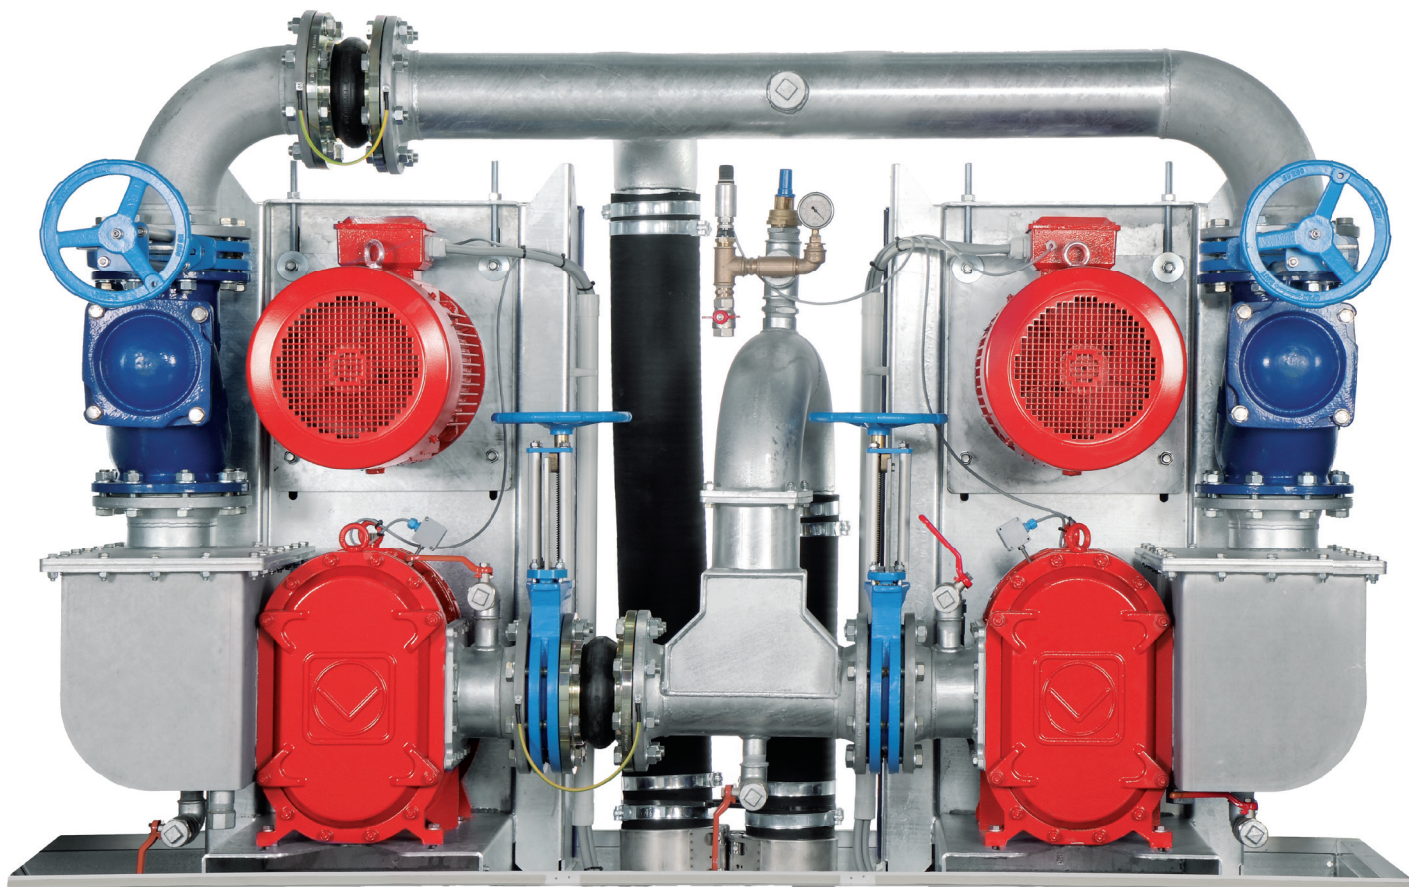

Whether you need a mobile or stationary single point system or a complete vacuum disposal network: All Vogelsang disposal systems are uniquely designed.


As the central pump station, the VacUnit guarantees the necessary suction for wastewater transport in closed vacuum line systems. The vacuum is generated directly by the integrated and proven Vogelsang VX rotary lobe pumps. The pump generates a vacuum of -0.6 bar even over large distances and pumps the wastewater directly into the sewage system. This means that the system can run smoothly with central controls, fewer components and smaller dimensions. The quick service design allows easy and comfortable access to the main components. It can be inspected and maintained quickly and easily, meaning fewer system stoppages. The outcome: high availability and low-intensity maintenance.

The VacUnit pump station is available in different mounting designs:


- in a compact cabinet for outdoor and platform-side installations
- in a system container with storage space for further components
- as a system without a cabinet to install in a plant room or as an underground assembly

Output:

- With a single pump station, capacity of 60 – 300 m³/h
- With a double pump station, capacity of 2x 60 – 300 m³/h
- Available motor output of 7.5 – 30 kW

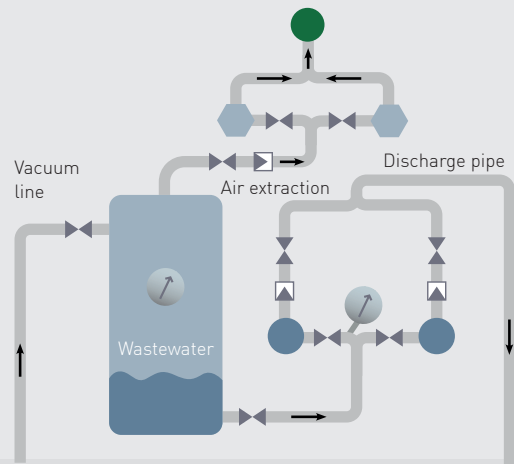


Conventional vacuum pumping station

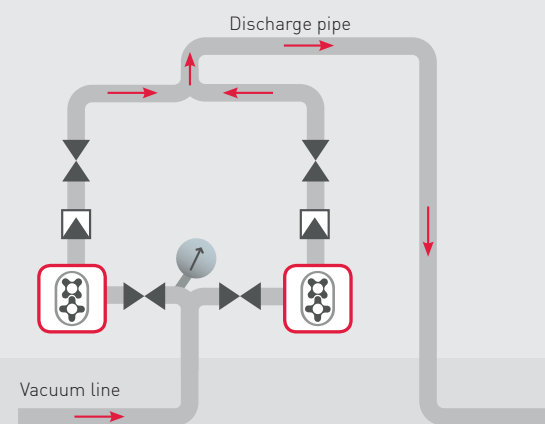

Vogelsang VacUnit DP double pump station

Thanks to fewer components with smaller dimensions, the Vogelsang double pump station is a smooth-running system. Its design makes it easy to service with high availability.

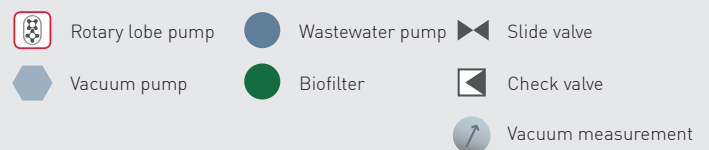

Advantages of the VacUnit

- Higher availability through duty /standby & assist pump installation
- Insensitive to foreign matter and clogging
- Central control
- No bulky vacuum reservoir tanks
- Vacuum generation and wastewater transport with the same pump unit
- Low susceptibility to failure because it has fewer component
- Takes up less space thanks to its compact design

What we offer

We provide solutions in the following sectors:
AGRICULTURAL TECHNOLOGY, BIOGAS,
INDUSTRY, TRANSPORTATION, WASTEWATER



Our broad range of products and services

- Consulting and service
- Data management and control technology
- Disintegration technology
- Individually tailored solutions for special applications
- Pumps and pump systems
- Solid matter feeders
- Spreading technology
- Supply and disposal systems for railway, busses and boats
- Wet grinders and solids reduction as well as separation technology

Copyright 2025 Vogelsang GmbH & Co. KG

Product availability, appearance, technical specifications and details are subject to continuous development. All information presented here is therefore subject to change. In selected countries, Vogelsang®, BioCut®, BlackBird®, CC-Serie®, EnergyJet®, HiCone®, PreMix®, RotaCut®, XRipper®, XSplit® and XTill® are registered trademarks of Vogelsang GmbH & Co. KG, Essen (Oldenburg), Germany. All rights reserved, including the rights to all graphics and images.

Stationary-Systems_EN_01207725_MET0000577- Printed in Germany

Vogelsang GmbH & Co. KG
Holthoege 10 – 14 | 49632 Essen (Oldenburg) | Germany
Phone: +49 5434 83 - 0 | Fax: +49 5434 83 -10
germany@vogelsang.info

vogelsang.info





SPECIFICATIONS

SUPPLY AND

DISPOSAL SYSTEMS

User-friendly service stations
for train care service depots


VOGELSANG – LEADING IN TECHNOLOGY

VOGELSANG



CabinetUnit SP

Cabinet system for wastewater disposal and water filling



Type	Dimensions approx. (L x W x H)	Weight approx.	Mains voltage	Motor output	Differential pressure up to	Working radius	Capacity up to	Water supply up to*	Operating mode
	mm	kg		kW	bar	m	l/min	l/min	
CabinetUnit SP A2 Plus	2,000 x 500 x 2,600	700	3 ~ 400 V 50 Hz	4	2	6.5	400	200	Manuel/ Semi-automatic
CabinetUnit SP B2 Plus	2,400 x 500 x 2,600	850	3 ~ 400 V 50 Hz	4	2	6.5	400	200	Manuel/ Semi-automatic
CabinetUnit SP C2 Plus	2,900 x 500 x 2,600	1,000	3 ~ 400 V 50 Hz	4	2	6.5	400	200	Manuel/ Semi-automatic
CabinetUnit SP A2 Pro	2,000 x 500 x 2,600	700	3 ~ 400 V 50 Hz	4	2	6.5	400	200	Automatic
CabinetUnit SP B2 Pro	2,400 x 500 x 2,600	850	3 ~ 400 V 50 Hz	4	2	6.5	400	200	Automatic
CabinetUnit SP C2 Pro	2,900 x 500 x 2,600	1,000	3 ~ 400 V 50 Hz	4	2	6.5	400	200	Automatic

* Values may vary depending on the system. Recommended reference values for planning: water filling QWS: 100-150 l/min. Suction QWD: 300-350 l/min


OPTIONS

Type	Tank rinsing	Frost protection	Wet area	Storage compartment	Sink	Cleaning agent dispenser	Soap dispenser	Eye washer	First aid kit
CabinetUnit SP A2 Plus	○	○	-	-	-	-	-	-	○
CabinetUnit SP B2 Plus	○	○	●	-	○	○	○	○	○
CabinetUnit SP C2 Plus	○	○	●	●	○	○	○	○	○
CabinetUnit SP A2 Pro	○	○	-	-	-	-	-	-	○
CabinetUnit SP B2 Pro	○	○	●	-	○	○	○	○	○
CabinetUnit SP C2 Pro	○	○	●	●	○	○	○	○	○

● Standard ○ Optional - Not available

VacUnit

Pump station for wastewater disposal



VacUnit SP	Amount of pump units	Capacity up to	Motor output	Mains voltage*	Differential pressure up to	Inlet & Outlet nominal size	Dimensions approx. (L x W x H)	Weight approx.
		m³/h	kW		bar	DN	mm	kg
VX136 - 105Q	1	60	7.5	3 ~ 400 V 50 Hz	2	100	1,900 x 1,100 x 1,900	630
VX136 - 140Q	1	80	11	3 ~ 400 V 50 Hz	2.5	100	1,900 x 1,100 x 1,900	725
VX136 - 210Q	1	110	15	3 ~ 400 V 50 Hz	3	150	1,900 x 1,100 x 1,900	680
VX186 - 184Q	1	160	22	3 ~ 400 V 50 Hz	3	150	2,250 x 1,100 x 1,900	1,100
VX186 - 260Q	1	300	30	3 ~ 400 V 50 Hz	2	200	2,250 x 1,100 x 1,900	1,350

* Motor in star / delta connection, optionally with soft start or frequency converter.




VacUnit MP	Amount of pump units	Capacity up to	Motor output	Mains voltage*	Differential pressure up to	Inlet & Outlet nominal size	Dimensions approx. (L x W x H)	Weight approx.
		m³/h	kW		bar	DN	mm	kg
VX136 - 105Q	2	2x60	2x7.5	3~400 V 50 Hz	2	100	3,000x1,100x2,000	1,150
VX136 - 140Q	2	2x80	2x11	3~400 V 50 Hz	2.5	100	3,000x1,100x2,000	1,350
VX136 - 210Q	2	2x110	2x15	3~400 V 50 Hz	3	150	3,000x1,100x2,000	1,650
VX186 - 184Q	2	2x160	2x22	3~400 V 50 Hz	3	150	3,000x1,100x2,000	2,150
VX186 - 260Q	2	2x300	2x30	3~400 V 50 Hz	2	200	3,150x1,100x2,000	2,700

* Motors in star/delta connection, optionally with soft start or frequency converter.

TUnit MP


Multiple station unit for
wastewater disposal and water supply



Type	Dimensions approx. (L x W)	Height	Weight approx.	Mains voltage	Working radius	Capacity up to*	Water supply up to*	Operating mode	Tank rinsing	Frost protection
	mm	mm	kg		m	l/min	l/min			
TUnit MP Plus	1,500 x 120	3,750 - 5,250	450	1 ~ 230 V 50 Hz	7.5	400	200	Manual/ Semi-automatic	<input type="radio"/>	<input type="radio"/>
TUnit MP Pro	1,500 x 120	3,750 - 5,250	450	1 ~ 230 V 50 Hz	7.5	400	200	Automatic	<input type="radio"/>	<input type="radio"/>

TUnit MPU


Multiple station unit for wastewater
disposal and water supply with in-ground base



Type	Dimensions approx. (L x W)	Height	Weight approx.	Mains voltage	Working radius	Capacity up to*	Water supply up to*	Operating mode	Tank rinsing	Frost protection
	mm	mm	kg		m	l/min	l/min			
TUnit MPU Eco	650 x 350	3,200 - 4,700	460	-	7.5	400	200	Mechanically manual	<input type="radio"/>	-
TUnit MPU Easy	650 x 350	3,200 - 4,700	460	1 ~ 230 V 50 Hz	7.5	400	200	Mechanically manual	<input type="radio"/>	<input type="radio"/>
TUnit MPU Plus	650 x 350	3,200 - 4,700	460	1 ~ 230 V 50 Hz	7.5	400	200	Manual/ Semi-automatic	<input type="radio"/>	<input type="radio"/>
TUnit MPU Pro	650 x 350	3,200 - 4,700	460	1 ~ 230 V 50 Hz	7.5	400	200	Automatic	<input type="radio"/>	<input type="radio"/>

TUnit SP

Single station unit for
wastewater disposal and water supply

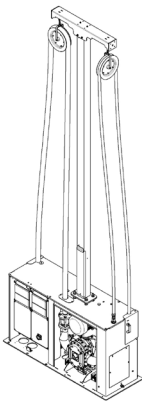

Type	Dimensions approx. (L x W)	Height	Weight approx.	Mains voltage	Motor output	Differential pressure up to	Working radius	Capacity up to*	Water supply up to*	Operating mode	Tank rinsing	Frost protection
	mm	mm	kg		kW	bar	m	l/min	l/min			
TUnit SP Plus	1,800 x 650	3,800 - 5,200	950	3 ~ 400 V 50 Hz	5.5	2	7.5	400	200	Manual/ Semi-automatic	○	○
TUnit SP Pro	1,800 x 650	3,800 - 5,200	950	3 ~ 400 V 50 Hz	5.5	2	7.5	400	200	Automatic	○	○

* Values may vary depending on the system. Recommended reference values for planning: water filling QWS: 100-150 l/min. Suction QWD: 300-350 l/min.

● Standard ○ Optional - Not available

What we offer

We provide solutions in the following sectors:
AGRICULTURAL TECHNOLOGY, BIOGAS,
INDUSTRY, TRANSPORTATION, WASTEWATER



Our broad range of products and services

- Consulting and service
- Data management and control technology
- Disintegration technology
- Individually tailored solutions for special applications
- Pumps and pump systems
- Solid matter feeders
- Spreading technology
- Supply and disposal systems for railway, busses and boats
- Wet grinders and solids reduction as well as separation technology

Copyright 2025 Vogelsang GmbH & Co. KG

Product availability, appearance, technical specifications and details are subject to continuous development.

All information presented here is therefore subject to change. In selected countries, Vogelsang®, BioCut®, BlackBird®, CC-Serie®, EnergyJet®, HiCone®, PreMix®, RotaCut®, XRipper®, XSplit® and XTilt® are registered trademarks of Vogelsang GmbH & Co. KG, Essen (Oldenburg), Germany. All rights reserved, including the rights to all graphics and images.

Systematic supply and disposal_TD_EN_01207725_MET0000578 - Printed in Germany

Vogelsang GmbH & Co. KG
Holthoege 10 – 14 | 49632 Essen (Oldenburg) | Germany
Phone: +49 5434 83 - 0 | Fax: +49 5434 83 -10
germany@vogelsang.info

vogelsang.info

